

TFS-3192R/W
Conventional Fire Alarm Sounder with Strobe






EN54-3 EN54-23

Teknim TFS-3192 internal fire alarm sounder and flasher have aesthetic design and low power consumption and are suitable for use with any brand of fire detection systems.

GENERAL FEATURES

- EN 54-3 and EN 54-23 Certified
- Wall mount
- 100dB high sound level
- IP21C protection class
- Red/White, transparent UL94 non-flammable poly carbonate plastic frame

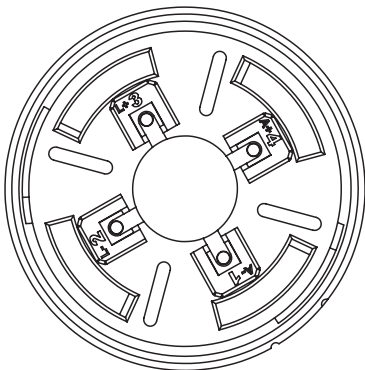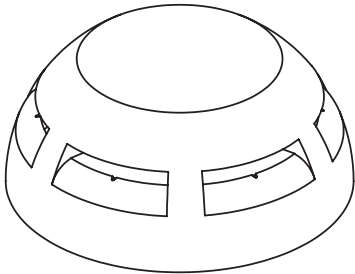

| Technical Specifications | TFS-3192W/R |
|--------------------------|--|
| Standard | EN-54/3 EN-54/23 |
| Operating Type | Sound + Flasher |
| Sound Level | 100dB±2 dB, (24VDC at 1 mt) |
| Coverage | W-2,4-4 |
| Flasher | 1 sec ON / 1 sec OFF |
| LED | RED/WHITE |
| LED Specifications | Wide angle 7x Bright LED |
| Sounder | Piezzo Element with leak-proof sealant |
| Power | 24-28 VDC |
| Alarm Consumption | 19mA. |
| Dimensions (mm) | Ø110, h:55 mm |
| Body Material | ABS Plastic |
| Operating Temperature | -20°C ~ 55°C |
| Humidity | 95% RH |
| Protection Class | IP21C |

Ordering Information

- TFS-3192R Conventional Fire Alarm Sounder With Strobe, Red
- TFS-3192W Conventional Fire Alarm Sounder With Strobe, White