



TM.ONTEC R M2 302 M DATA 2



Catalog number	TM-OR.M2DDM300W
Application	anti-panic lighting
Duration time	3 h
Operating mode	M
Version	DD - DATA2
Colour	RAL9003
Luminous flux	288 lm
Maximum light power (the luminaire can power the light source with a different power)	2 W
Active power	7.2 W
Power supply	210+250 V AC 50+60 Hz
Power supply CB	186+254 V DC
Dimming mode	yes
Temperature range	10-35 °C
Material	PC
IP	IP20
IK	IK03
Battery	LiFePO4/C 6.4V 1.5Ah
Warranty	24 months - ST 36 months - AT 60 months - DATA, CB
LED Lifetime	50 000 work hour
Appliance classes	2

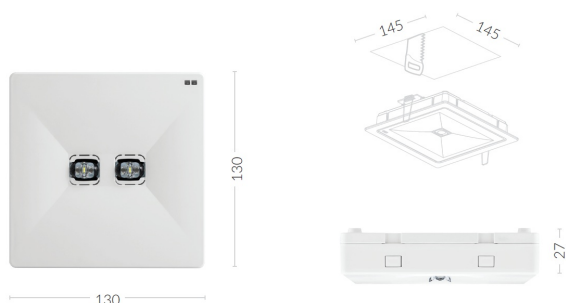

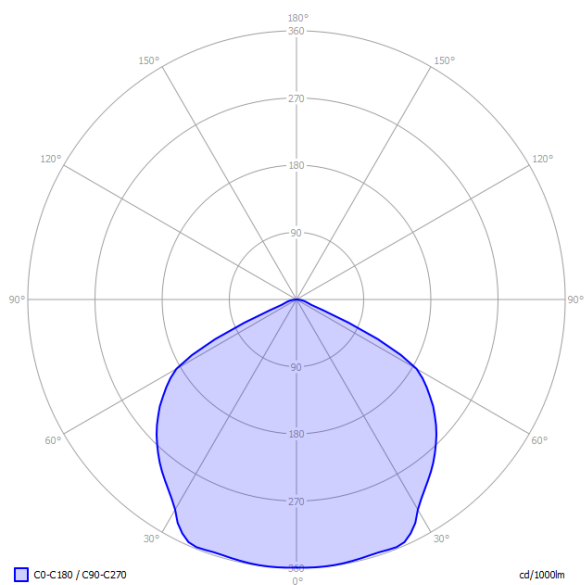

PHOTOMETRY [m]

Ceiling height	Distance wall - fitting	Distance fitting - fitting
2,5	3,8	8,3
3,0	4,3	9,4
4,0	4,9	11,6
5,0	5,1	13,3
6,0	5,2	14,5
7,0	5,3	15,8
8,0	5,2	16,0
9,0	5,0	16,4
10,0	4,9	16,6

